

Humidifier Instructions

Le Veil iCigar DCH-210

We care about quality in cigars


Thank you for purchasing this Le Veil product. This portable digital cigar humidifier features room temperature, and humidity (expressed as relative humidity or RH). also features temperature and humidity memory (3 days average, high/low) and more. Please read this manual in its entirety and fully enjoy the benefits and features of this product. Please keep this manual for future reference.

Note: A clear film is applied to the top face that must be removed prior to using this product. Locate the clear tab and simply peel to remove.

Humidifier features

- Compact, On-Cover of Humidor Design
- Hybrid Technology for dual AC or DC power
- Dual Recalibrating Technology for accuracy
- Rechargeable battery with charger
- Charger with computer USB port
- Low battery-life and alarm indicator
- Low water and alarm indicator
- Maintains Up to 300CT Humidor

Product Diagram

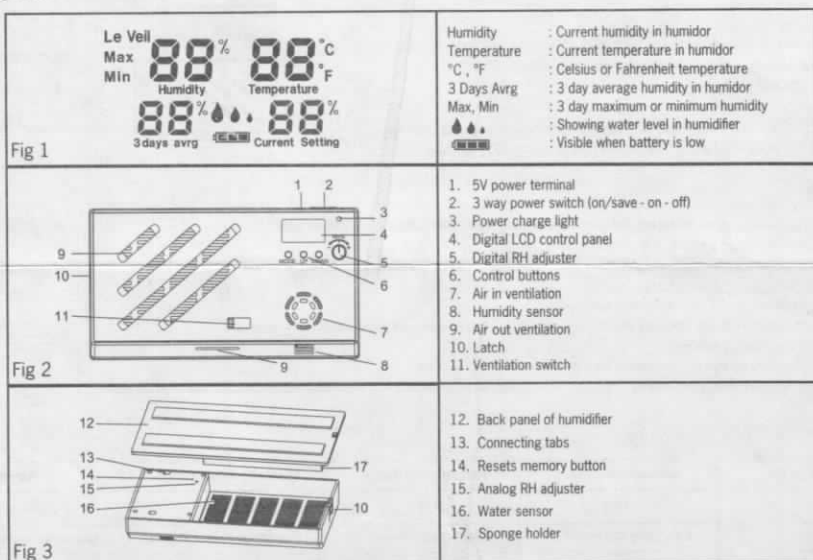


The Button Instruction

- A. Press and hold 'MODE' button 3 seconds then release the 'MODE' button on the digital hygrometer, RH Setting numbers will start to blink on the display: Press the 'UP' button to raise humidity and 'DOWN' to lower humidity.
- B. The fan will draw off moisture automatically when humidity is lower than 1% of what it is set for. for example: the humidity setting is 70% but the actual humidity is 69%. The fan will stop when humidity is higher than the humidity setting by 1% (for example: the humidity setting is 70%, but the humidity is 71%).
- C. Quickly Press 'MODE' button to switch from °C or °F.
- D. Press 'Up' or 'DOWN' button to display the Max/Min humidity.
- E. When water is low, the LCD display will show 1 water point (●), and the Di Di alarm song will start playing for 1/2 min. This means you will need to refill the water. Turn off alarm song - pushing any key.

To add water

- Turn off humidifier.
- Open cover and take out the sponge.
- Add distilled water in sponge then squeeze until water is no longer dripping out of sponge freely. Wipe off any excess water around humidifier.
- Once you have added water and re-covered humidifier with upper cover, then it will be ready for use again.

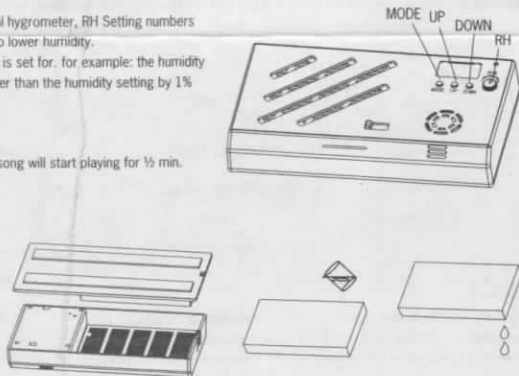

Dual Re-calibrating Adjusters

Each humidifier was factory pre-calibrated at 70%, but if you believe that your humidifier is not correct, DCH-200 allows you to manually adjust and re-calibrate hygrometer using the steps below, then place back into humidifier and allow 24 hours for accuracy.

Digital RH adjuster (shown on picture FIG 1)


1. Always adjust digital RH adjuster first.
2. To re-calibrate turn the RH% knob clockwise, with each click it will add ~1%, counter clockwise each click will ~-1%. You can re-calibrate up to a total of +/- 4%. After adjusting then place humidifier back into humidifier allowing 24 hours for accuracy.


Analog RH adjuster (shown on picture FIG 3)

3. To re-calibrate turn the RH% screw clockwise, with each two turns it will add ~1%, counter clockwise will ~-1%. Then use digital RH adjuster to adjust as desired. After adjusting then place humidifier back into humidifier allowing 24 hours for accuracy.

Charging Battery


DCH-200 humidifier is equipped with a re-chargeable Li-Ion battery. The Red LED light will come on when battery is charging. The LED light will turn green when the battery is fully charged.

- Charge the humidifier fully before you start using it for the first time or after a long period of non-use. Turn off humidifier and charge approximately 12 hours until fully charged.
- When battery power is low the LCD will display  and the 'Didi' alarm song will start playing. This means you will need to recharge battery. Turn off alarm song – pushing any key.
- You can leave humidifier running and charge the battery at the same time inside humidifier. The flat cable can pass through humidifier and plug into power outlet. It will take about 20 hours to fully charge.
- Charge with computer USB cable (optional) – Turn off humidifier and plug USB cable into computer until fully charged. Charging time may vary depending on each computers power.

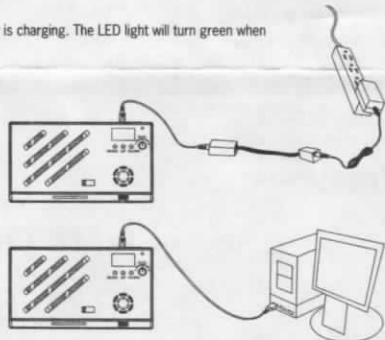

Suggestion

- New humidors – It is best to switch the power switch to 'ON' position (middle) over night and run until humidifier reaches 70% then switch to power save mode 'ON/S'.
- Larger then 100ct humidors – we suggest using power mode with cable connected with transformer for max power.
- Open Air out ventilation – use for new or larger humidifier.
- Close air out ventilation – use for existing or small humidifier.
- Fully charged batteries can run approximately 25–40 hours on 'ON' position (middle) and approximately 25–30 days on battery save mode 'ON/S' position.
- Computer will check humidity every 3 min and run fan if needed on save mode 'ON/S'.
- We suggest keeping cigars in at approximately 65%–72% humidity and 60°–70° room temp. High temperatures will promote mold on cigars.



Product Specifications

Factory Pre-set	Humidifier Accuracy	Temperature Range	Manually Adjust Range	Battery
70%	±1%	0–99°C	40%–90%	Li-Ion/3.6V/DC
Size	Operating Current/Fan	Wall Outlet Power	Humidifier Power Import	Measures Humidity Reading
7 1/4" L × 4" W × 1 1/8" H	78mA	100–240V AC	5.5V/DC	40%–90%, ±3%

Unpack the casing; remove all the poly bags and packing materials as shown below:



Humidifier




Connect Cable



DC converter and DC connection line



Transformer



Instructions



Guarantee

Le Veit

Engineered in the United States
Manufactured in China
Patent rights issued and/or pending

Diseño en Estados Unidos
Fabricado en China
Derechos de patente expedidos y/o pendientes

Conçu aux Etats-Unis
Fabriqué en Chine
Brevets déposés/ou en cours